


GEOSTAR G5 LQS

GEOSTAR G5 LQS, 230V/2800W, test channel, copper wedge, EU plug
Article 156.135



Article	156.135	
Voltage	230 V	
Frequency	50/60 Hz	
Power	2800 W	
Temperature	80 – 460 °C	176.0 – 860.0 °F
Speed	0.8 – 12.0 m/min	2.62 – 39.37 ft/min
Welding Technology	Hot wedge	
Hot wedge length	90 mm	3.54 in
Hot wedge width	50 mm	1.96 in
Hot wedge material	Copper	
Max. overlap	150 mm	5.9 in
Max. welding pressure	1500 N	337.21 lbf
Weld seam width	2 x 15 mm / 2 x 0.59 in	
Roll material	Steel roller sharp diagonal	
LQS	Yes	
Display	Yes	
Length	482.0 mm	18.97 in
Width	278.0 mm	10.94 in
Height	269.0 mm	10.59 in
Weight	16.8 kg	37.03 lb
Welding materials	PE	
	HDPE	
	LDPE	
	LLDPE	

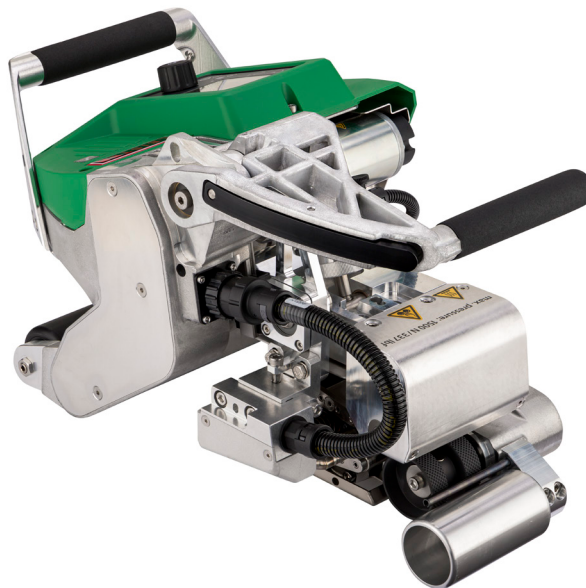

GEOSTAR G5 LQS

GEOSTAR G5 LQS, 230V/2800W, test
channel, copper wedge, EU plug
Article 156.135

	PP	
	TPO	
	FPO	
Weldable material thicknesses	0.8 – 3.0 mm	31.49 – 118.11 mil
Power cable length	3.0 m	9.84 ft
Plug	EU, 3 poles, 16A	
Approvals	CE	
	CB Certification	
	UKCA	
Protection class	I	
Country of origin	CH	