


GEOSTAR G7

GEOSTAR G7, 230V/2800W, test channel, copper wedge, EU plug
Article 151.035



| | | |
|-----------------------|-----------------------------|---------------------|
| Article | 151.035 | |
| Voltage | 230 V | |
| Frequency | 50/60 Hz | |
| Power | 2800 W | |
| Temperature | 80 – 460 °C | 176.0 – 860.0 °F |
| Speed | 0.8 – 12.0 m/min | 2.62 – 39.37 ft/min |
| Welding Technology | Hot wedge | |
| Hot wedge length | 130 mm | 5.11 in |
| Hot wedge width | 50 mm | 1.96 in |
| Hot wedge material | Copper | |
| Max. overlap | 150 mm | 5.9 in |
| Max. welding pressure | 1500 N | 337.21 lbf |
| Weld seam width | 2 x 15 mm / 2 x 0.59 in | |
| Roll material | Steel roller sharp diagonal | |
| LQS | No | |
| Display | Yes | |
| Length | 482.0 mm | 18.97 in |
| Width | 278.0 mm | 10.94 in |
| Height | 269.0 mm | 10.59 in |
| Weight | 18.1 kg | 39.9 lb |
| Welding materials | PE | |
| | HDPE | |
| | LDPE | |
| | LLDPE | |

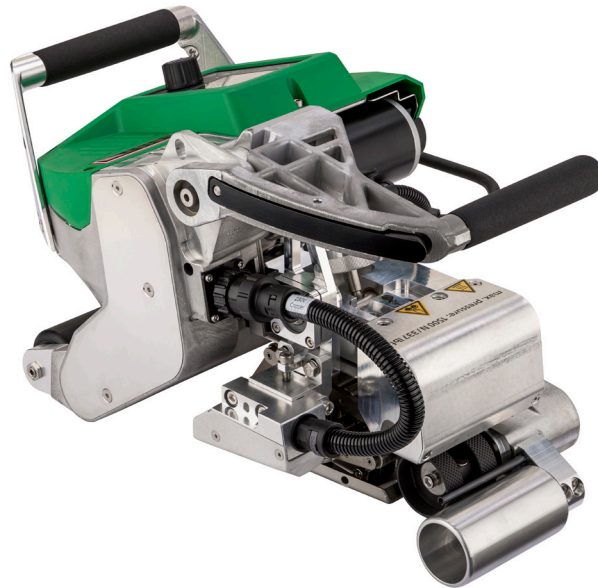

GEOSTAR G7

GEOSTAR G7, 230V/2800W, test channel, copper wedge, EU plug
Article 151.035

| | | |
|-------------------------------|------------------|--------------------|
| | PP | |
| | TPO | |
| | FPO | |
| Weldable material thicknesses | 1.0 – 3.0 mm | 39.37 – 118.11 mil |
| Power cable length | 3.0 m | 9.84 ft |
| Plug | EU, 3 poles, 16A | |
| Approvals | CE | |
| | CB Certification | |
| | UKCA | |
| Protection class | I | |
| Country of origin | CH | |