


# GEOSTAR G7 LQS

GEOSTAR G7 LQS, 230V/2800W, copper test channel, EU plug

Article 155.152



To the product item

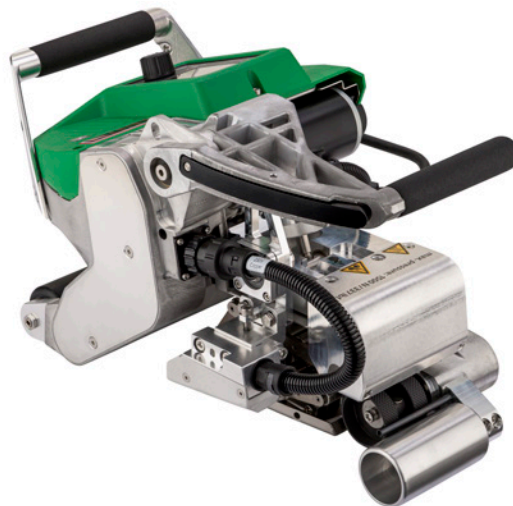

## Technical data

|                               |                                     |                   |
|-------------------------------|-------------------------------------|-------------------|
| Article                       | 155.152                             |                   |
| Voltage                       | 230 V                               |                   |
| Frequency                     | 50/60 Hz                            |                   |
| Power                         | 2800 W                              |                   |
| Temperature                   | 80-460 °C                           | 176-860 °F        |
| Speed                         | 0.8-12 m/min                        | 2.62-39.37 ft/min |
| Welding Technology            | Hot wedge                           |                   |
| Hot wedge length              | 130 mm                              | 5.11 in           |
| Hot wedge width               | 50 mm                               | 1.96 in           |
| Hot wedge material            | Copper                              |                   |
| Max. overlap                  | 150 mm                              | 5.9 in            |
| Max. welding pressure         | 1500 N                              | 337.21 lbf        |
| Weld seam width               | 2 x 15 mm / 2 x 0.59 in             |                   |
| Roll material                 | Steel roller sharp diagonal         |                   |
| LQS                           | Yes                                 |                   |
| Display                       | Yes                                 |                   |
| Length                        | 482 mm                              | 18.97 in          |
| Width                         | 278 mm                              | 10.94 in          |
| Height                        | 269 mm                              | 10.59 in          |
| Weight                        | 18.1 kg                             | 39.9 lb           |
| Welding materials             | FPO; HDPE; LDPE; LLDPE; PE; PP; TPO |                   |
| Weldable material thicknesses | 1-3 mm                              | 39.37-118.11 mil  |
| Power cable length            | 3 m                                 | 9.84 ft           |
| Plug                          | EU, 3 poles, 16A                    |                   |



# GEOSTAR G7 LQS

GEOSTAR G7 LQS, 230V/2800W, copper test channel, EU plug

Article 155.152

## Technical data

|                   |                      |
|-------------------|----------------------|
| Approvals         | CB Certification; CE |
| Protection class  | I                    |
| Country of origin | Switzerland          |

## Scope of delivery

151.847 Cylinder brush, brass  $\varnothing$  15 mm; 173.145 Test certificate; 106.852 Allen wrench 3 mm; 100.530 Allen wrench 4 mm; 115.109 Allen wrench 5 mm; 153.777 Tool case