


GEOSTAR G5

GEOSTAR G5, 230V/2800W, testkanaal,
koperen wig, UK-stekker
Artikel 156.311



Artikel	156.311	
Spanning	230 V	
Frequentie	50/60 Hz	
Prestaties	2800 W	
Temperatuur	80 – 460 °C	176.0 – 860.0 °F
Snelheid	0.8 – 12.0 m/min	2.62 – 39.37 ft/min
Lastechniek	Hete wig	
Hete wig Lengte	90 mm	3.54 in
Hete wig breedte	50 mm	1.96 in
Hot wedge materiaal	Koper	
Max. overlapping	150 mm	5.9 in
Max. lasdruk	1500 N	337.21 lbf
Breedte lasnaad	2 x 15 mm / 2 x 0.59 in	
Rol materiaal	Stalen roller scherpe diagonaal	
LQS	Geen	
Weergave	Ja	
Lengte	482.0 mm	18.97 in
Breedte	278.0 mm	10.94 in
Hoogte	269.0 mm	10.59 in
Gewicht	16.8 kg	37.03 lb
Lasmaterialen	PE	
	HDPE	
	LDPE	
	LLDPE	

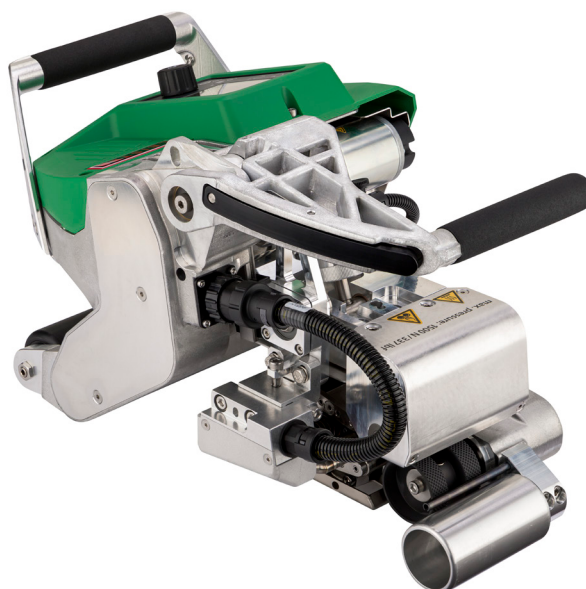

GEOSTAR G5

GEOSTAR G5, 230V/2800W, testkanaal,
koperen wig, UK-stekker
Artikel 156.311

	PP	
	TPO	
	FPO	
Lasbare materiaaldiktes	0.8 – 3.0 mm	31.49 – 118.11 mil
Lengte voedingskabel	3.0 m	9.84 ft
Stekker	UK, 3-polig, 13A	
Goedkeuringen	CE	
	CB Certificering	
	UKCA	
Beschermingsklasse	I	
Land van herkomst	CH	