


GEOSTAR G7



To the product

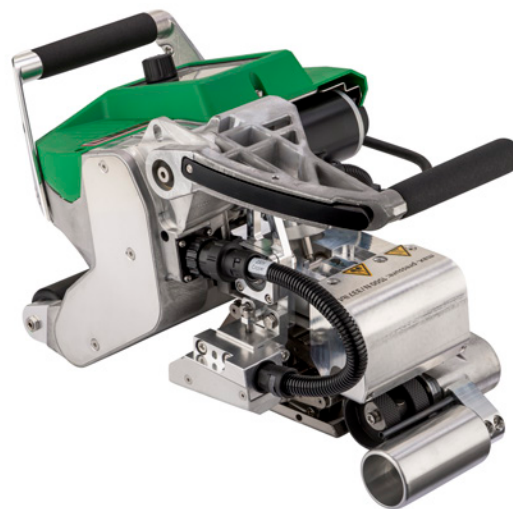

Technical data

Article	151.035; 156.310	
Voltage	230 V	
Frequency	50/60 Hz	
Power	2800 W	
Temperature	80-460 °C	176-860 °F
Speed	0.8-12 m/min	2.62-39.37 ft/min
Welding Technology	Hot wedge	
Hot wedge length	130 mm	5.11 in
Hot wedge width	50 mm	1.96 in
Hot wedge material	Copper	
Max. overlap	150 mm	5.9 in
Max. welding pressure	1500 N	337.21 lbf
Weld seam width	2 x 15 mm / 2 x 0.59 in	
Roll material	Steel roller sharp diagonal	
LQS	No	
Display	Yes	
Length	482 mm	18.97 in
Width	278 mm	10.94 in
Height	269 mm	10.59 in
Weight	18.1 kg	39.9 lb
Welding materials	FPO; HDPE; LDPE; LLDPE; PE; PP; TPO	



GEOSTAR G7

Technical data

Weldable material thicknesses	1-3 mm	39.37-118.11 mil
Power cable length	3 m	9.84 ft
Plug	EU, 3 poles, 16A; UK, 3 poles, 13A	
Approvals	CB Certification; CE	
Protection class	I	
Country of origin	Switzerland	

Scope of delivery

Cylinder brush, brass ø 15 mm; Test certificate; Allen wrench 3 mm; Allen wrench 4 mm; Allen wrench 5 mm; Tool case

Product items

151.035	GEOSTAR G7, 230V/2800W, copper test channel, EU plug
156.310	GEOSTAR G7, 230V/2800W, copper test channel, UK plug