


KRELUS G5-25 SUPER-MINI



To the product

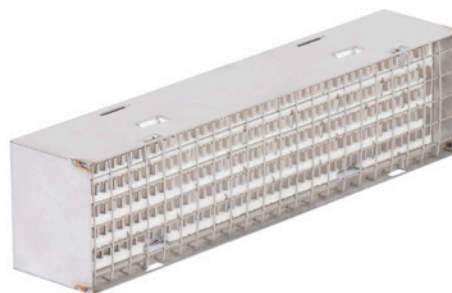

Technical data

Article	122.926; 122.927; 123.162; 123.163	
Voltage	77 V	
Current	7-12.5 A	
Frequency	50/60 Hz	
Power	540-960 W	
Power density	34.56-61.44 kW/m ²	22.29-39.63 W/in ²
Max. ambient temperature	500 °C	932 °F
Pyrometer hole position	Standard; Without	
Length	248 mm	9.76 in
Width	61 mm	2.4 in
Height	50 mm	1.96 in
Weight	0.6 kg	1.32 lb
Approvals	CE	
Protection class (IEC 60529)	IP20	
Protection class	I	

Product items

122.926	KRELUS IR-Heater G5-25 SM 5 L, 77V/540W
122.927	KRELUS IR-Heater G5-25 SM 5 LP, 77V/540W
123.162	KRELUS IR-Heater G5-25 SM 5, 77V/960W
123.163	KRELUS IR-Heater G5-25 SM 5 P, 77V/960W