


RBR



To the product

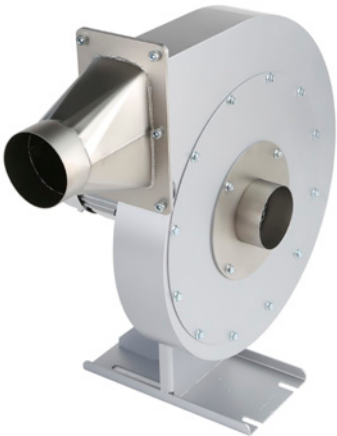

Technical data

Blower type	Radial blower	
Phases	3x	
Voltage at 50 Hz	230/400 V	
Voltage at 60 Hz	277/480 V	
Frequency	50/60 Hz	
Blower power at 50 Hz	550 W	
Blower power at 60 Hz	660 W	
Airflow (20 °C) at 50 Hz	10550 l/min	372.56 cfm
Airflow (20 °C) at 60 Hz	12300 l/min	434.36 cfm
Static pressure at 50 Hz	1630 Pa	0.23 psi
Static pressure at 60 Hz	2350 Pa	0.34 psi
Max. air inlet temperature	350 °C	662 °F
Max. ambient temperature	60 °C	140 °F
Noise emission level	61 dB (A)	
Air inlet (outer diameter)	90 mm	3.54 in
Air outlet (outer diameter)	90 mm	3.54 in
Length	615 mm	24.21 in
Width	375 mm	14.76 in
Height	613 mm	24.13 in
Weight	19 kg	41.88 lb



RBR

Technical data

Approvals	CE
Protection class (IEC 60529)	IP54
Protection class	I

Scope of delivery

Outlet flange for RBR, ø 90 mm; Inlet flange for RBR, ø 90 mm

Product items

156.049 RBR, 3 x 230/400V 50Hz, 3 x 277/480V 60Hz